

## E2000 Attenuator Connector Type

### V1.0


#### 1. Description

This kind of attenuator is widely used to connect optical signal.

#### 2. Features

- Attenuation: 1db-25db
- Return Loss, PC>40db; APC>60db, UPC>50db
- Accuracy of attenuation:  $\pm 0.5\text{db}$ (for 1-9db)/  $\pm 0.5\%$  ( for 10-30db )
- Polarization:  $\leq 0.5\text{db}$
- Wave Length: 1310nm And 1550nm(SM) 1550nm(DSF)
- Working Temperature:  $-20^{\circ}\text{C} \sim +70^{\circ}\text{C}$

#### 3. Photo

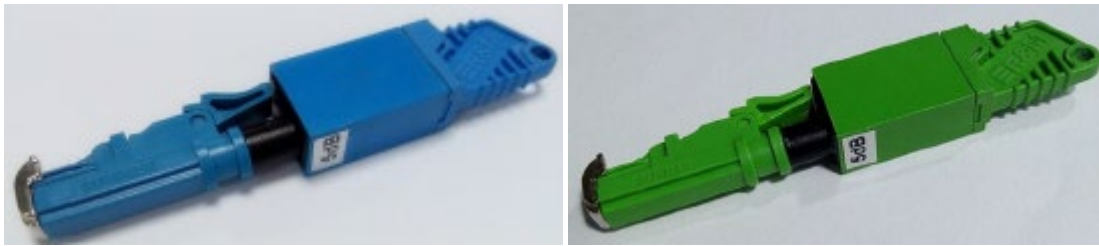

#### 4. Dimension

