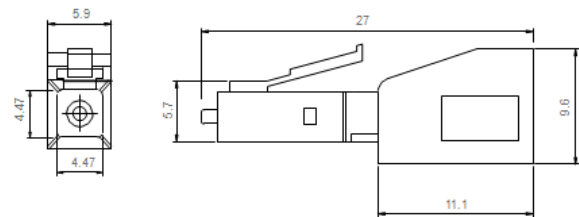
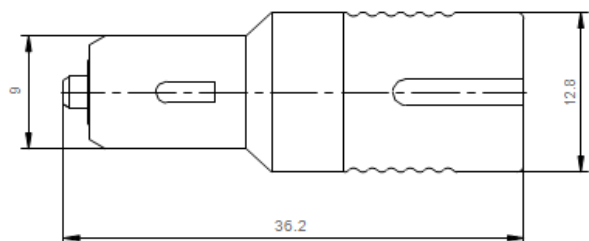



ATTENUATOR FAMILY V1.0
Feature:

- Low insertion loss and back reflection loss.
- High Precision of Mechanical Dimensions.
- Compliant with Telcordia GR-326-Core, IEC, TIA.
- RoHS compliant.
- 100% Optic test.


ITEM	SPECIFICATION
Type	Fixed type attenuator
ATTENUATION RANGE	1-5 dB ± 0.5 dB 6-10 dB ± 1.0 dB 11-20 dB ± 10%
RETURN LOSS	PC>50dB, UPC>55dB, APC>60dB
OPERATIONAL WAVELENGTHS	1310nm or 1550nm or 1310nm and 1550nm
OPERATING TEMPERATURE	-20 ~ +75°C

Dimension:
LC Connector Type Attenuator

SC Connector Type Attenuator

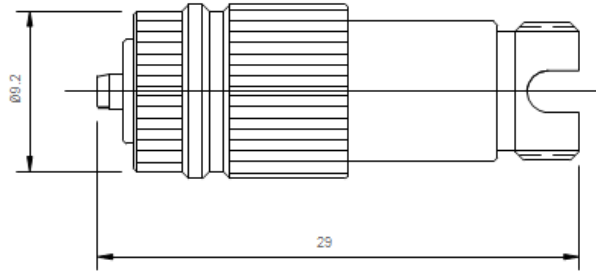
FC Connector Type Attenuator

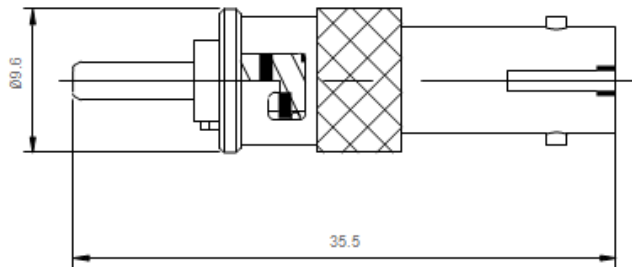

ST Connector Type Attenuator



ORDER INFORMATION

TYPE		Plug Type		Material		Value	
01	FC/PC	01	Adapter type	01	Metal	01	3dB
02	SC/PC	02	Connector Type	02	Plastic	02	5dB
03	LC/PC					03	7dB
04	ST/PC					04	10dB
05	MU/PC					05	15dB
06	FC/APC					06	20dB
07	SC/APC					07	25dB
08	LC/APC						